


PROOFER-ROLL-IN RETARDER PROOFER

SINMAG
machines



Digital control panel

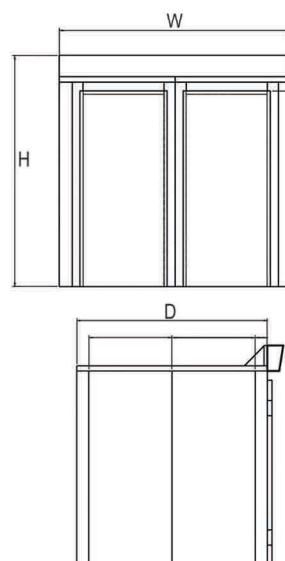

Features

- Durable construction.
- Available with single door or double door, four door.
- Digital control panel, can be customized.
- 3-steps in operation: -Retard; -Recovery; -Proof.
- Working fast and efficiently, yielding even proofing with full loads or partial loads.
- Built with durable components, reliable easy-to-use controls, and built refrigeration systems.
- Retarder proofer makes the process of proofing easy and consistent, keeping uniform temperatures throughout the racks and even constant airflow while adding the versatility of retarding in the same space.



Model

DC-2R

DC-4R

DC-6R

DC-8R

Capacity(number of racks)	2	4	6	8
Tray Size (mm)	400X600	400X600	400X600	400X600
Rack Size(mm)	675X825X1800	675X825X1800	675X825X1800	675X825X1800
Dimension(mm)	Width	1215	2190	2190
	Depth	2000	2000	2875
	Height	2470	2605	2470
Weight(kg)	420	500	510	600
Door	single door	double door	double door	four doors(front and back)
Compressor Power(hp)	1.75	2	1.75X2	2X2
Heater Power(kw)	4	6	8	12
Control Mode	digital control panel	digital control panel	digital control panel	digital control panel
Temperature Range(°C)	2~40	2~40	2~40	2~40
Outside Panel	stainless steel with 50mm PU insulation			
Remark	any size of Roll-in Retarder Proofer can be customized according to requirements.			